


## 9-58 Heavy Duty Non-Locking Pneumatic Mast Survival Wind Speed Un-Guyed Performance Curve

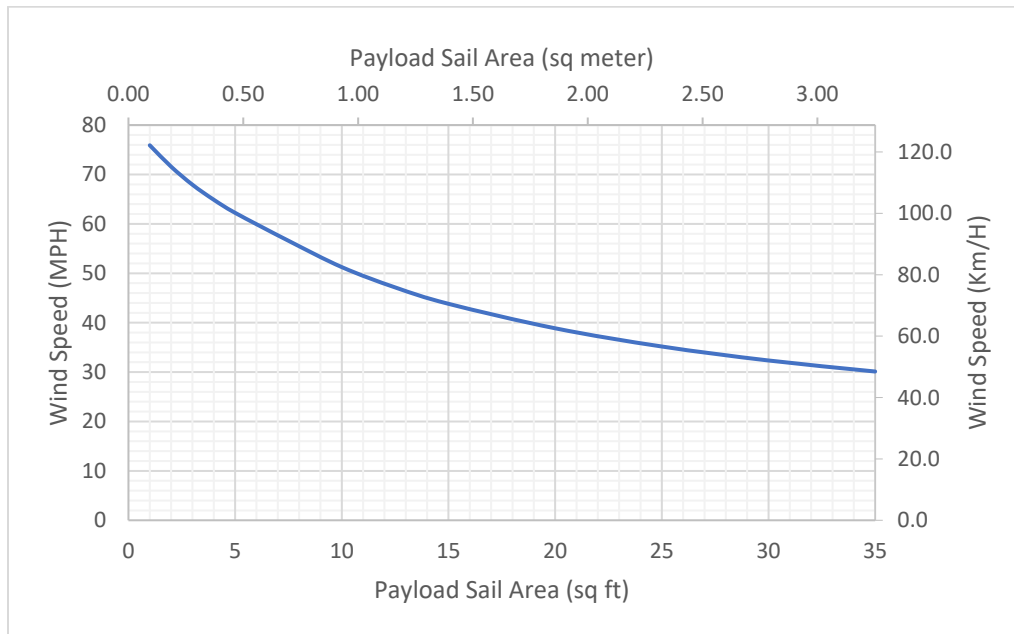

|  |                                   |
|--|-----------------------------------|
| <p><u>Mast</u></p> <ul style="list-style-type: none"> <li>• 9-58 HDNL Pneumatic Mast <ul style="list-style-type: none"> <li>• Nest Height = 8 ft 11 in [2.72 m]</li> <li>• Fully Extended Height = 58 ft 0 in [17.69 m]</li> <li>• No of Tubes = 9</li> <li>• Tube Set = 3.00" – 9.00"</li> <li>• Max Payload Capacity = 200 lbs. [90.72 kg]</li> </ul> </li> </ul>  | <p><u>No Guying Available</u></p> |
| <p><u>Survival Wind Speed Assumptions</u></p> <ul style="list-style-type: none"> <li>• Payload Weight = 200 lbs. [90.72 kg]</li> <li>• Payload Coefficient of Drag = 1.3</li> <li>• Payload centroid is on mast axis and 12" [304.8 mm] above top of mast</li> <li>• Mast securely constrained at bottom of mast as well as approximately 5" [127 mm] below collar of base tube by WB supplied hardware or equivalent</li> <li>• 0 degree mast base deployment angle</li> <li>• All wind speeds measured at ground level</li> <li>• Cabling is secured together and fixed to the mast</li> <li>• Survival wind speed will be reduced for increasing payload centroid distance above top of mast</li> <li>• This analysis does not include any evaluation of the stability of a trailer, the trailer, outriggers, and anchors are assumed fixed.</li> </ul> |                                   |

The mast performance values in this report represent a theoretical prediction of mast performance based on available payload details. Actual mast performance may vary.